

*Producing Drinking water
1,500 liters per hour
by Gasoline Engine Pump.*


Cycleclean[®] 1500

Cycleclean 1500
generates drinking water from swimming pools,
rivers, lakes and well water.
High-performance 0.1 micron filtration
*remove 0-157, cryptosporidium,
and Legionella bacteria completely.*



Nippon Basic Co.Ltd

Gasoline Engine Operation and Filter Location also can be operated by Hand Pump.

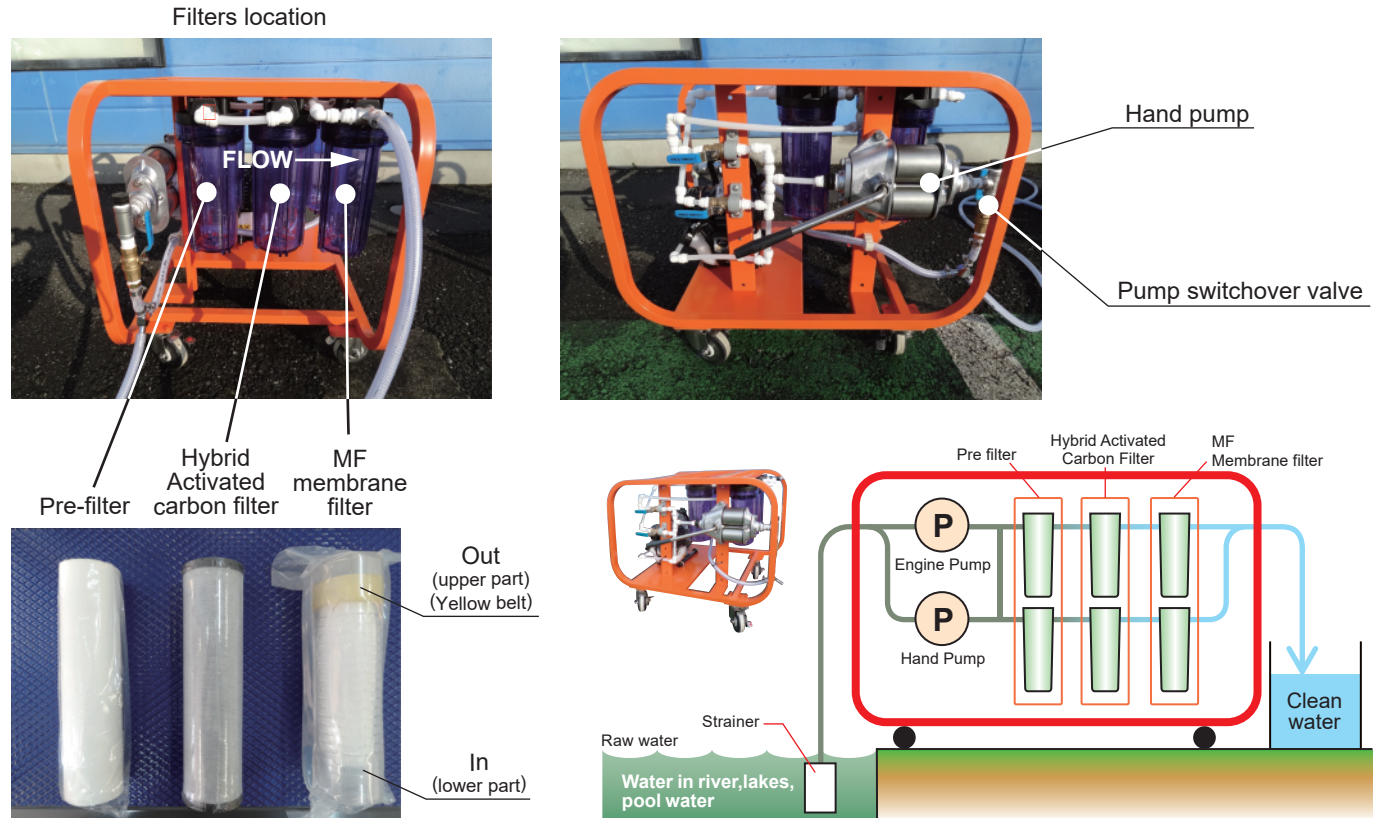

Technical Specification

| | |
|--------------------------|---|
| 1. Structure | This product is a water purification apparatus for emergency use consisting of a pre-filter, a hybrid carbon filter and a hollow fiber membrane for pure water. |
| 2. Performance | Target amount of water to be produced: Approx. 1,500 liter per hour Note: *Data above are of initial value and are not guaranteed. |
| 3. Specification | Dimension; W 620 × D 800 × H 670(mm) inclusive of the 70mm lever |
| Weight | When dried: about 50kg, at max about 65kg with water |
| Power source & operation | Gasoline engine or a Hand pump |
| Operation hours | About 0.5 hour (Put fuel in and start engine again) |
| Materials | Stainless steel SUS304 (baking finished) |
| Condition | Outdoor but do not expose it to rain for a long time. |
| Outside temperature | Within 5°~ 40°C |
| Pump lead-in | Horizontal direction: within -1m depth , Vertical direction: within 5m long |
| Full fuel | Nonleaded regulator gasoline: 0.5 liter |
| Standard accessories | Hose for purified water (A-hose) x 1, Feed water hose with a strainer (B-hose) x 1, Hose band x 2, Filter Housing wrench x1 |
| Raw water / Water source | Live river and lake water inhabited by fish, piped water, well water and swimming pool water |
| Note: | *Frequency of replacement of filters depends on upon the quality of raw water. (Replacement of filters is recommended when you notice water flow slowing down, bad smell and irregular noise.) |



Nippon Basic Co. Ltd

